



**ENGINEERING TEST REPORT
NUMBER: 10216476EUS1**

ON
Model No.(s):
BB-BONE-000

IN ACCORDANCE WITH:
CFR 47, PART 15, SUBPART B,
CLASS B VERIFICATION

TESTED FOR:
Circuitco Electronics
1380 Presidential, Suite 100
Richardson, Texas 75081

TESTED BY:
Nemko USA, Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Total Number of Pages: 21

TESTED BY:	<u>Brian Boyea</u>	DATE:	<u>02-Nov-2011</u>
	Brian, Boyea, EMC Engineer		
APPROVED BY:	<u>Arturo Ruvalcaba</u>	DATE:	<u>14-Nov-2011</u>
	Arturo Ruvalcaba, EMC Engineer		



NVLAP Lab Code 100428-0

Nemko USA, Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety, for use by the company's employees only.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA, Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS.....	3
SECTION 2.	EQUIPMENT UNDER TEST (E.U.T.)	4
SECTION 3.	EQUIPMENT CONFIGURATION	6
SECTION 4.	CONDUCTED EMISSIONS (MAINS PORTS).....	7
SECTION 5.	RADIATED EMISSIONS	12
SECTION 6.	MICROWAVE RADIATED EMISSIONS.....	17
SECTION 7.	TEST METHODS AND BLOCK DIAGRAMS.	18
SECTION 8.	LABELING REQUIREMENTS.....	21

Section 1. Summary of Test Results

General:

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with CFR 47, Part 15, Subpart B for Class B Digital Devices.

These tests were conducted using measurement procedures of ANSI C63.4-2003.

The equipment was tested for conducted emissions from 0.150 MHz to 30 MHz using a 50 microhenry line impedance stabilization network (L.I.S.N.) as described in ANSI C63.4-2003. Peripheral equipment was also operated through a 50 microhenry L.I.S.N.

The equipment was tested for radiated emissions from 30 MHz to 1000 MHz in accordance with the requirements of CFR 47, Part 15, Subpart B. Equipment with oscillator frequencies above 108 MHz were tested to the fifth harmonic or in accordance with the requirements of CFR 47, Part 15.33.

Frequencies were initially identified in a semi-anechoic chamber. Amplitude measurements were made in a semi-anechoic chamber. Details of the chamber are on file with the FCC and Industry Canada.

Abstract:

Name of Test	Basic Standard	Results
Conducted Emissions (Mains port)	CFR 47, Part 15, Subpart B Para. No. 15.107	Complies
Radiated Emissions	CFR 47, Part 15, Subpart B Para. No. 15.109	Complies

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE: **NONE**

Section 2. Equipment Under Test (E.U.T.)

Manufacturer: Circuitco Electronics
Name: BeagleBone
Model Number: BB-BONE-000
Serial Number: 22
Part Number: BB-BONE-000
Production Status: Pre-Production
E.U.T. Arrival Date: 11/2/11

Description of E.U.T.:

Development Board

Clock, Oscillator, Highest Frequencies Utilized:

25MHz,24MHz,48MHz,100MHz

Justification:

The E.U.T. was configured for testing as per typical installation. Position and bundling of cables were investigated to establish maximum amplitude of emissions.


Exercise Program:

The E.U.T. exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

The EUT was in the following exercise mode:

Powered on running.


E.U.T. Photographs:

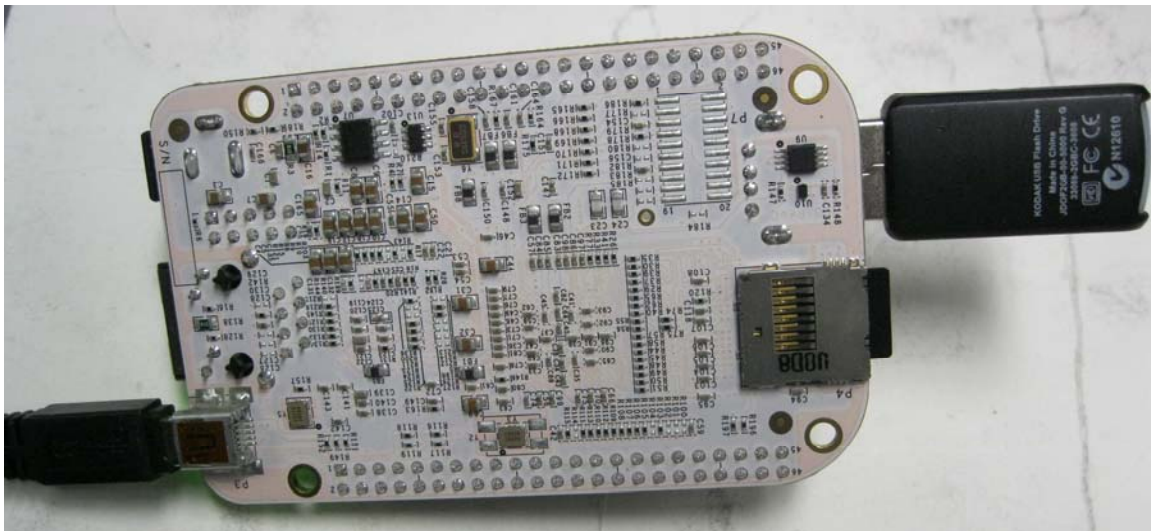

Section 3. Equipment Configuration

Equipment Configuration List:			
Item	Description	Identification: (M/N #, S/N #, P/N #, Rev.)	
(A)	Laptop	Dell Latitude S/N E6410 15665268 601	
(B)	Ethernet Cable	Fry's	
(C)	USB Cable	Qualtek 3021003-03	
(D)	2GB Thumbdrive	Kodak 2GB	
(E)	EUT	BeagleBone S/N 22 Rev B	
(F)	SD Card	Kingston 2GB	
(G)			
(H)			
(I)			
(J)			

EUT Power and Interfaces:			
Item	Description	Type	Qty
i.			
ii.	USB Cable to the PC	5	1

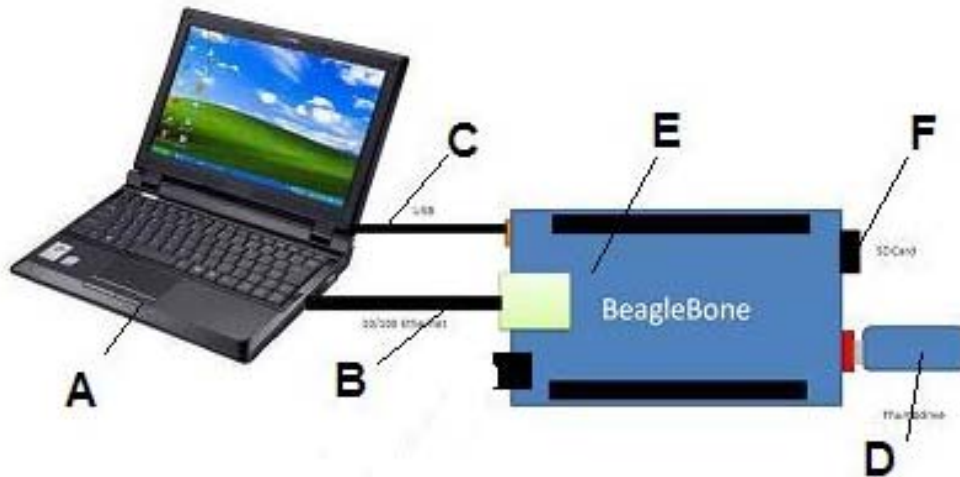

Section 4. Conducted Emissions (Mains ports)

Purpose:

The test is intended to demonstrate the compliance of the Equipment Under Test (E.U.T.) to the limits for conducted disturbance as defined by CFR 47, Part 15, Subpart B, Class B, Paragraph Number 15.107.

Specification Limits:

Limits for conducted disturbance at the mains ports

Frequency Range (MHz)	Quasi-peak Limits (dBuV)	Average Limits (dBuV)
0.15 to 0.50	66 - 56	56 - 46
0.50 to 5.00	56	46
5.00-30.0	60	50

Method of Measurement (Procedure ANSI C63.4-2003):

Measurements were made using a spectrum analyzer with 10 kHz RBW, Peak detector. Any emissions that are close to the limit are measured using a test receiver with 9 or 10 kHz bandwidth, CISPR Quasi-Peak detector.

See Sections 7 and 8.



Test #: CEPV-01
Tested By: Brian Boyea
Date of Tests: 11/2/11
Test Conditions:
Test Voltage: 120 Vac
Temperature: 25°C
Humidity: 45%


Test Results:

The E.U.T. complies.
The Conducted Emissions were measured on the power cube of the lab computer

TEST EQUIPMENT

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
674	Limiter	Hewlett Packard	11947A	3107A02200	01-Nov-2011	01-Nov-2012
704	Filter, High Pass, 5KHz	Solar Electronics	7930-5.0	933126	01-Nov-2011	01-Nov-2012
749	Cable, 6m	Nemko USA, Inc.	RG223		25-Feb-2011	25-Feb-2012
811	1.5m Cable Assy	Nemko USA, Inc.	RG223		25-Feb-2011	25-Feb-2012
1258	LISN .15mhz-30mhz	EMCO	3825/2	1305	31-Oct-2011	31-Oct-2012
1663	Spectrum Analyzer	Rohde & Schwartz	FSP3	100073	2-Sept-2011	2-Sept-2013

**Test Data –Conducted Emissions, Power Lines Test#CEPV-01
 Line 1**

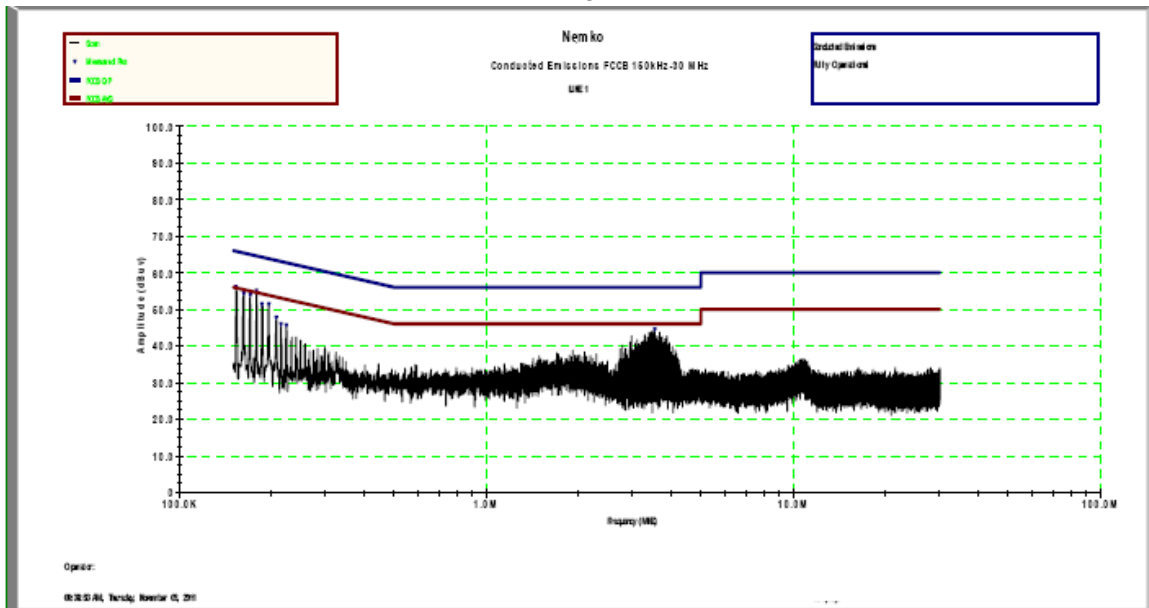


Nemko
 Line 1 Final QP/AVG
 Operator: Brian

Frequency MHz	FCCB QP LIMIT	FCCB AVG LIMIT	AVG Meas	AVG Margin	QP Meas	QP Margin
0.15	65.88	55.88	36.01	-19.87	53.10	-12.78
0.16	65.66	55.66	35.04	-20.63	51.47	-14.19
0.17	65.43	55.43	32.89	-22.54	49.19	-16.24
0.18	65.24	55.24	30.13	-25.11	51.11	-14.13
3.52	56.00	46.00	24.48	-21.52	37.12	-18.88

Conducted Emissions
 Fully Operational

Line 2

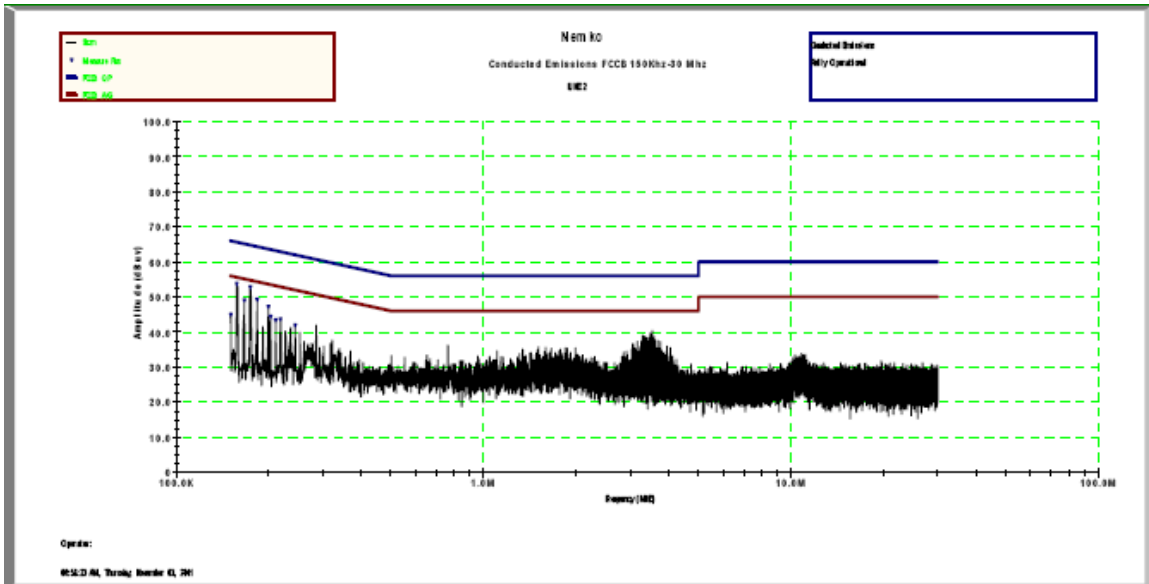

FCC B Conducted Emissions

Nemko
 Line 2 Peaks
 Operator: Brian

Frequency MHz	Peaks	FCC B AVG Limit	FCC B QP Limit	Avg Margin	QP Margin
0.151	44.96	55.98	65.98	-11.02	-21.02
0.157	53.78	55.79	65.79	-2.01	-12.01
0.167	49.08	55.52	65.52	-6.45	-16.45
0.174	52.81	55.31	65.31	-2.50	-12.50
0.184	49.27	55.04	65.04	-5.77	-15.77
0.200	47.20	54.58	64.58	-7.38	-17.38
0.203	44.32	54.49	64.49	-10.17	-20.17
0.211	43.38	54.26	64.26	-10.88	-20.88
0.218	43.65	54.05	64.05	-10.39	-20.39
0.244	41.92	53.32	63.32	-11.40	-21.40

Test Photographs



Section 5. Radiated Emissions

Purpose:

The tests are intended to demonstrate the compliance of the Equipment Under Test (E.U.T.) to the limits for radiated emissions as defined by CFR 47, Part 15, Subpart B, Class B, Paragraph Number 15.109.

Specification Limits:

Limits for radiated disturbance of Class B(CISPR 22)

Frequency Range (MHz)	3m Limits (dBuV)	10m Limits (dBuV)
30-230	40.0	30.0
230-1000	47.0	37.0

Method of Measurement (Procedure ANSI C63.4-2003):

The equipment was prescanned in a semi-anechoic chamber using a spectrum analyzer and broadband antenna. A list of frequencies was compiled for investigation in the semi-anechoic chamber. The bandwidth was set to 100 kHz and the detector function was CISPR Quasi-Peak.

Any emissions above 1 GHz were measured with a horn antenna and low noise pre-amplifier at a distance of 3 meters.

See Sections 7 and 8.



Test #: REHE-01
Tested By: Brian Boyea
Date of Tests: 11/2/11
Test Conditions:
Test Voltage: 120 Vac
Temperature: 25°C
Humidity: 45%

Test Results:


The E.U.T. complies.

TEST EQUIPMENT


Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
1	3m Semi-Anechoic Chamber	Nemko USA, Inc.	Chamber	1	26-Sept-2011	26-Sept-2012
1016	Preamplifier	Hewlett Packard	8449A	2749A00159	20-July-2011	20-July-2012
1025	Preamplifier, 25dB	Nemko USA, Inc.	LNA25	399	23-Feb-2011	23-Feb-2012
1304	Antenna, Horn	Electro Metrics	RGA-60	6151	24-Nov-2010	24-Nov-2012
1480	Antenna, Bilog	Schaffner-Chase	CBL6111C	2572	19-Jan-2011	19-Jan-2012
1767	Receiver, EMI Test 20Hz - 26.5 GHz - 150 - +30 dBm LCD	Rohde & Schwartz	ESIB26	837491/0002	01-Dec-2010	01-Dec-2011
1783	Cable Assy, 3m Chamber	Nemko	Chamber		26-Sept-2011	26-Sept-2012

Test Data –Radiated Emissions, Electric Field, Test#REHE-01

Horizontal

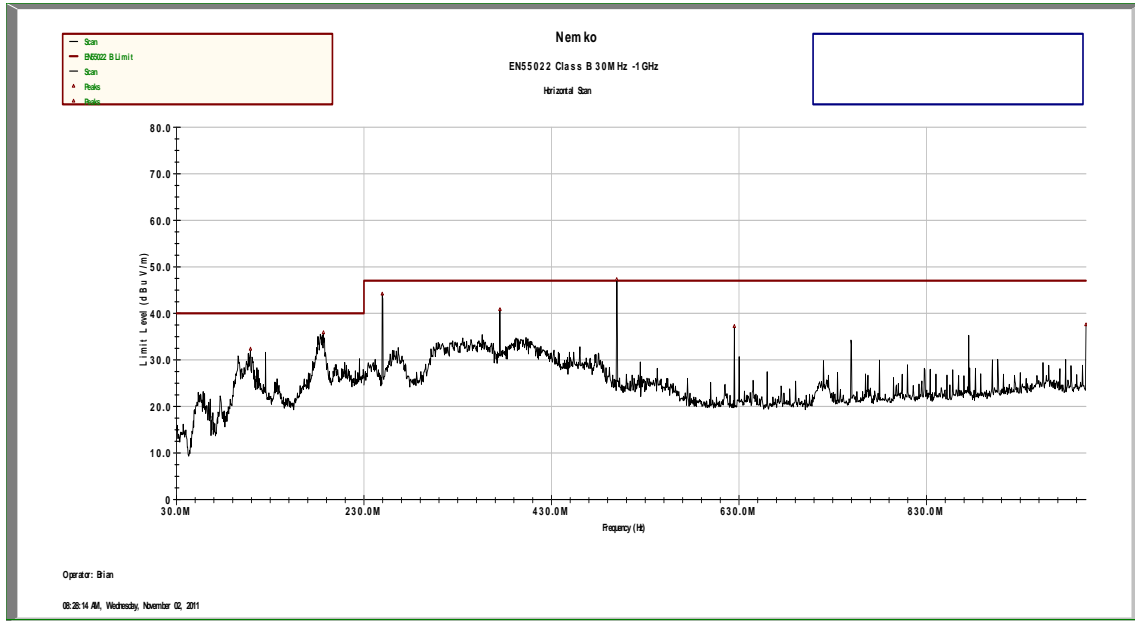

Vertical

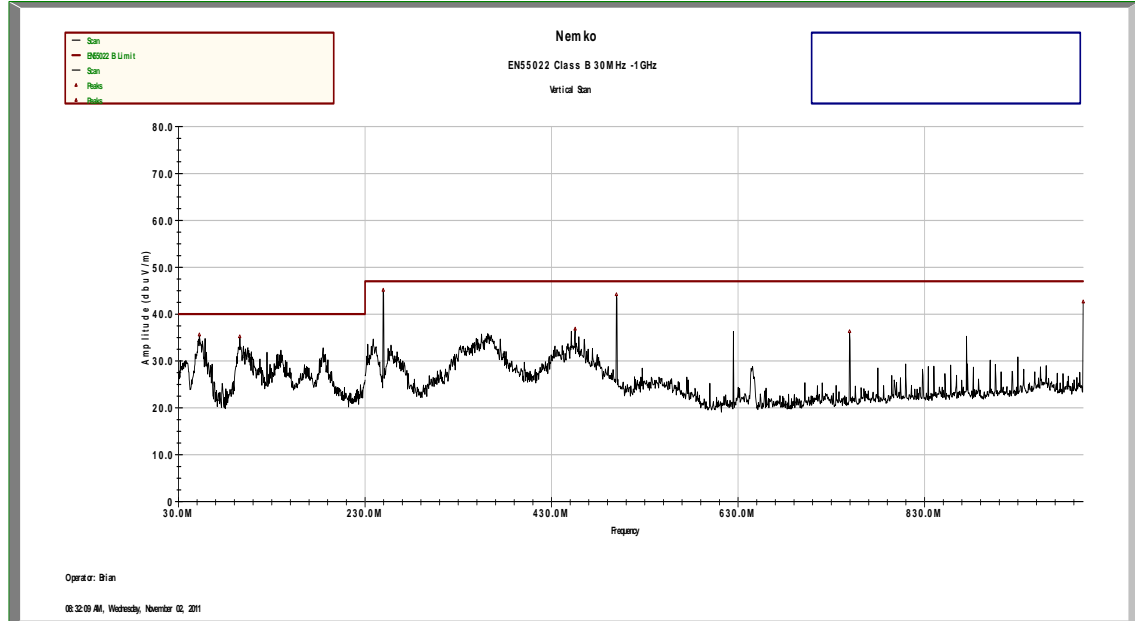

Nemko, Lewisville, TX
FCC 3 Meter Chamber
Final Quasi Peak Measurements
Operator: Brian

Frequency MHz	Limit	Horizontal QP	QP Margin	Vertical QP	Vertical Margin
51.94	40.00			29.38	-10.63
95.77	40.00			28.36	-11.64
108.82	40.00	31.05	-8.95		
186.27	40.00	26.21	-13.79		
250.01	47.00	44.81	-2.19	42.72	-4.28
375.03	47.00	36.57	-10.43		
455.75	47.00			28.43	-18.57
499.99	47.00	44.44	-2.56		
500.03	47.00			32.94	-14.06
625.01	47.00	38.47	-8.53		
750.01	47.00			34.36	-12.64
999.98	47.00	43.17	-3.83	41.85	-5.15

30 MHz to 1GHz was the spectrum searched.
RBW = 120kHz
VBW = 120kHz

Test Photographs - Test # REHE-01



Section 6. Microwave Radiated Emissions

N/A The EUT has no clocks above 108MHz.

Purpose:

The tests are intended to demonstrate the compliance of the Equipment Under Test (E.U.T.) to the limits for radiated emissions as defined by CFR 47, Part 15, Subpart B, Class B, Paragraph Number 15.109.

Specification Limits:

Limits for radiated disturbance of Class B

Frequency Range (MHz)	3m Limits (dBuV)	10m Limits (dBuV)
Above 960	50	40

Method of Measurement (Procedure ANSI C63.4-2003):

The equipment was prescanned in a semi-anechoic chamber using a spectrum analyzer and horn antenna. A list of frequencies was compiled for investigation in the semi-anechoic chamber with an average detector.


Any emissions above 1 GHz were measured with a horn antenna and low noise pre-amplifier at a distance of 3 meters. The bandwidth was set to 1 MHz and the detector function was average.

See Sections 7 and 8.

Section 7. Test Methods and Block Diagrams. Conducted Emissions (Mains Ports)

- Applicable Test Standard: CFR 47, FCC Pt 15, Subpart B
- The test set-up is as per the test configuration diagram.
- The E.U.T. is configured as typically used.
- The E.U.T. and any accessories are operated with typical load conditions.
- Conducted power line measurements are made from 150 kHz to 30 MHz.
- For each current carrying conductor of each power cord associated with the E.U.T., the emission closest to the limit is recorded.
- Initial measurements are made using a spectrum analyzer with 10 kHz RBW, peak detector. If emissions are below the Average limit, the unit is deemed to be compliant.
- Any emissions within 6dB of the quasi peak limit are measured using a test receiver with 9 kHz bandwidth, CISPR quasi-peak detector.
- Bandwidths used on the test receiver are those specified in CISPR 16-1.

Test Configuration - Power line Conducted Emissions:

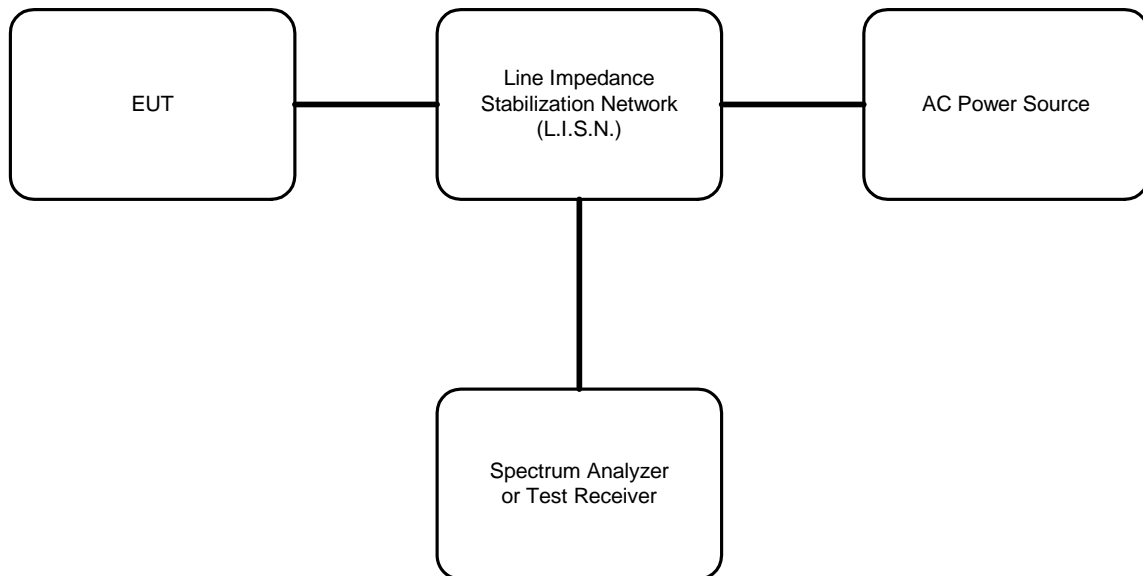


Radiated Emissions

Test Method - Radiated Emissions:

- Applicable Test Standard: CFR47, FCC Pt 15, Subpart B
- The test set-up in the shielded room is as per the test configuration diagram.
- The E.U.T. is configured as typically used.
- The E.U.T. and any accessories are operated with typical load conditions.
- Radiated emissions measurements are made from 30 MHz to 1000 MHz.
- The equipment was prescanned in the semi-anechoic chamber using a spectrum analyzer and broadband antenna to produce a list of frequencies.
- Variations in antenna height, antenna polarization, and E.U.T. azimuth are explored to produce the emission that has the highest amplitude relative to the limit.
- The frequencies noted in the preliminary test are investigated on the semi-anechoic chamber where amplitude measurements are made.
- Any emissions above 1 GHz are measured using a horn antenna and low noise pre-amplifier at a distance of 3 meters. The bandwidth was set to 1 MHz and the detector function was average.

Test Configuration - Radiated Emissions:

Radiated Pre-scan:

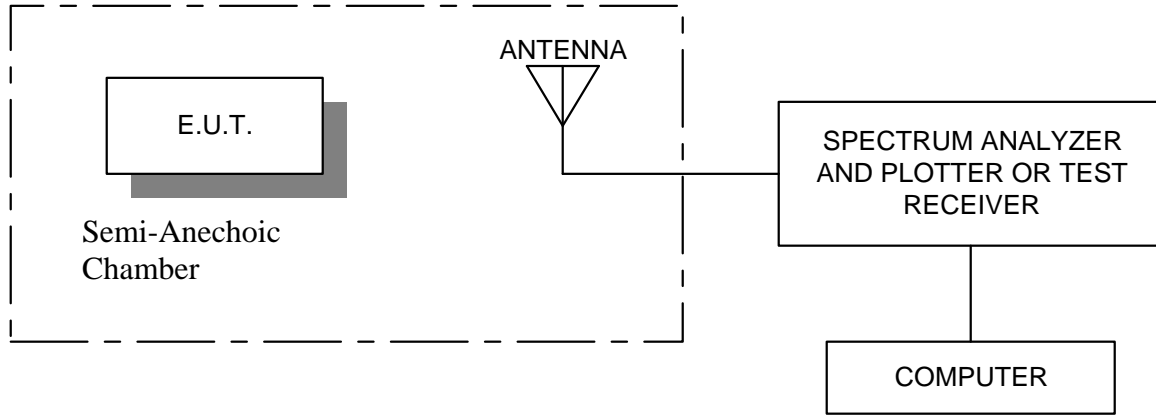

Section 8. Labeling Requirements

Your product has successfully complied with 47 CFR FCC Part 15.B Class B requirements.

FCC Class B Label:

This device has been tested and Verified to comply with Part 15, Class B, of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

In addition to placing the above label on your product, the three items that are required to be included in your product's manual are:

- (1) For a Class B Verified device, the instructions furnished to the user shall include the following or similar statement, placed in a prominent location at the front of the manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
-

- (2) The user's manual must caution the user that changes or modifications not expressly approved by the party responsible for compliance (you/your company) could void the user's authority to operate the equipment.
- (3) In addition, the instruction manual must include appropriate instructions on the first page of the manual concerning installation of the device or special accessories (special cabling, shields, adapters) that must be used with the device. An appropriate caution statement should warn the user to utilize the special accessories supplied with the equipment for continued FCC compliance.