



Introducing The “Lab in a Box” Concept

ELC Portland, March 2018


Patrick Titiano - Kevin Hilman, Baylibre.

About us

- Baylibre
 - Embedded Linux Consultancy, Engineering Services
 - 25 senior engineers, coming from the semiconductor world
 - HW and SW products: from concept to manufacturing
 - Upstream Linux kernel development and maintenance
 - Founding developers and active contributors to kernelCI.org project



Teaser: this is... LAVA box...

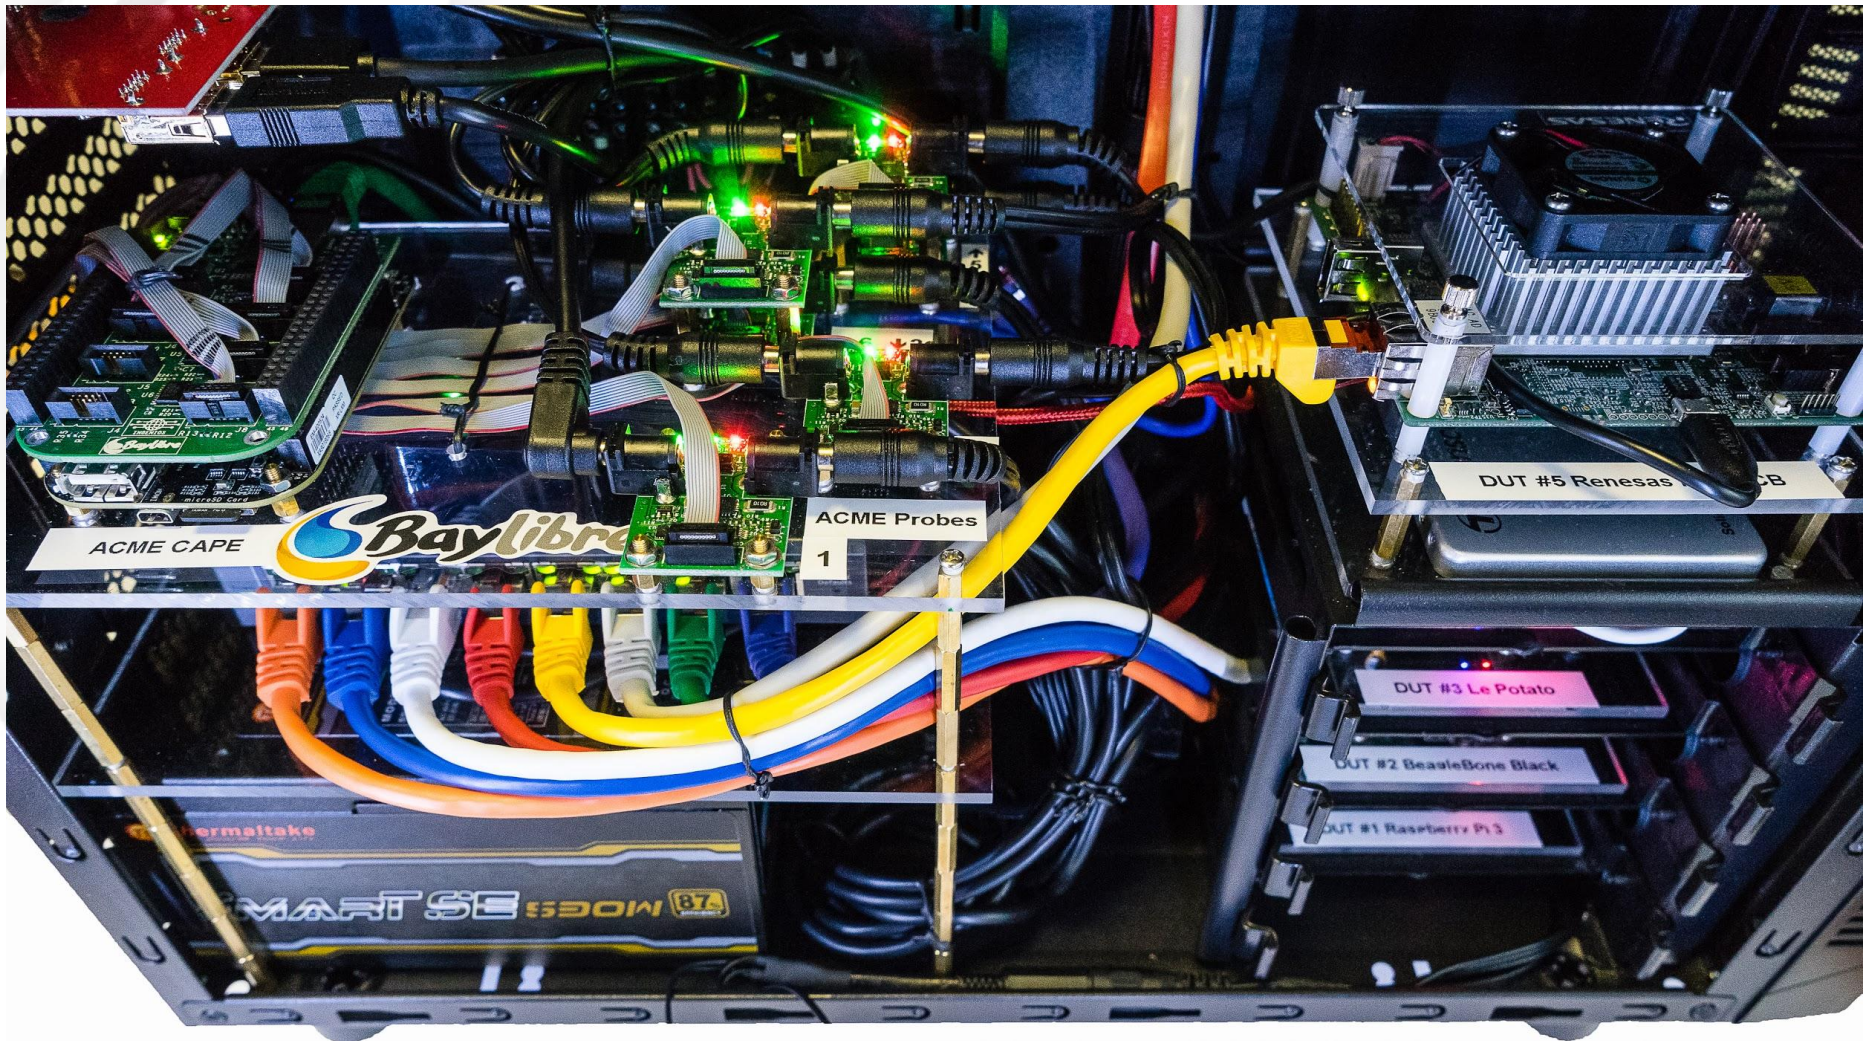


Let's see how we got there!



- **Build & Boot Test Automation System**
 - Focused on **upstream Linux kernel**,
 - Open Source, Community based,
 - (welcomes contributions like HW / Lab / infrastructure / resources)
 - Distributed, leveraging **LAVA**
- Since May 2014 :
 - Performed **3.5M+ boots** on **250+ boards**, across **3 architectures** and **34 SoCs**. (**2500+ boots** per day.)
- Results reported via mailing lists and web site
- Much more likely that kernels will build... and run
 - v3.14: 51 failed configs
 - v4.1: 1 failed config
 - v4.13.y: 0 failed configs



KernelCI Loop

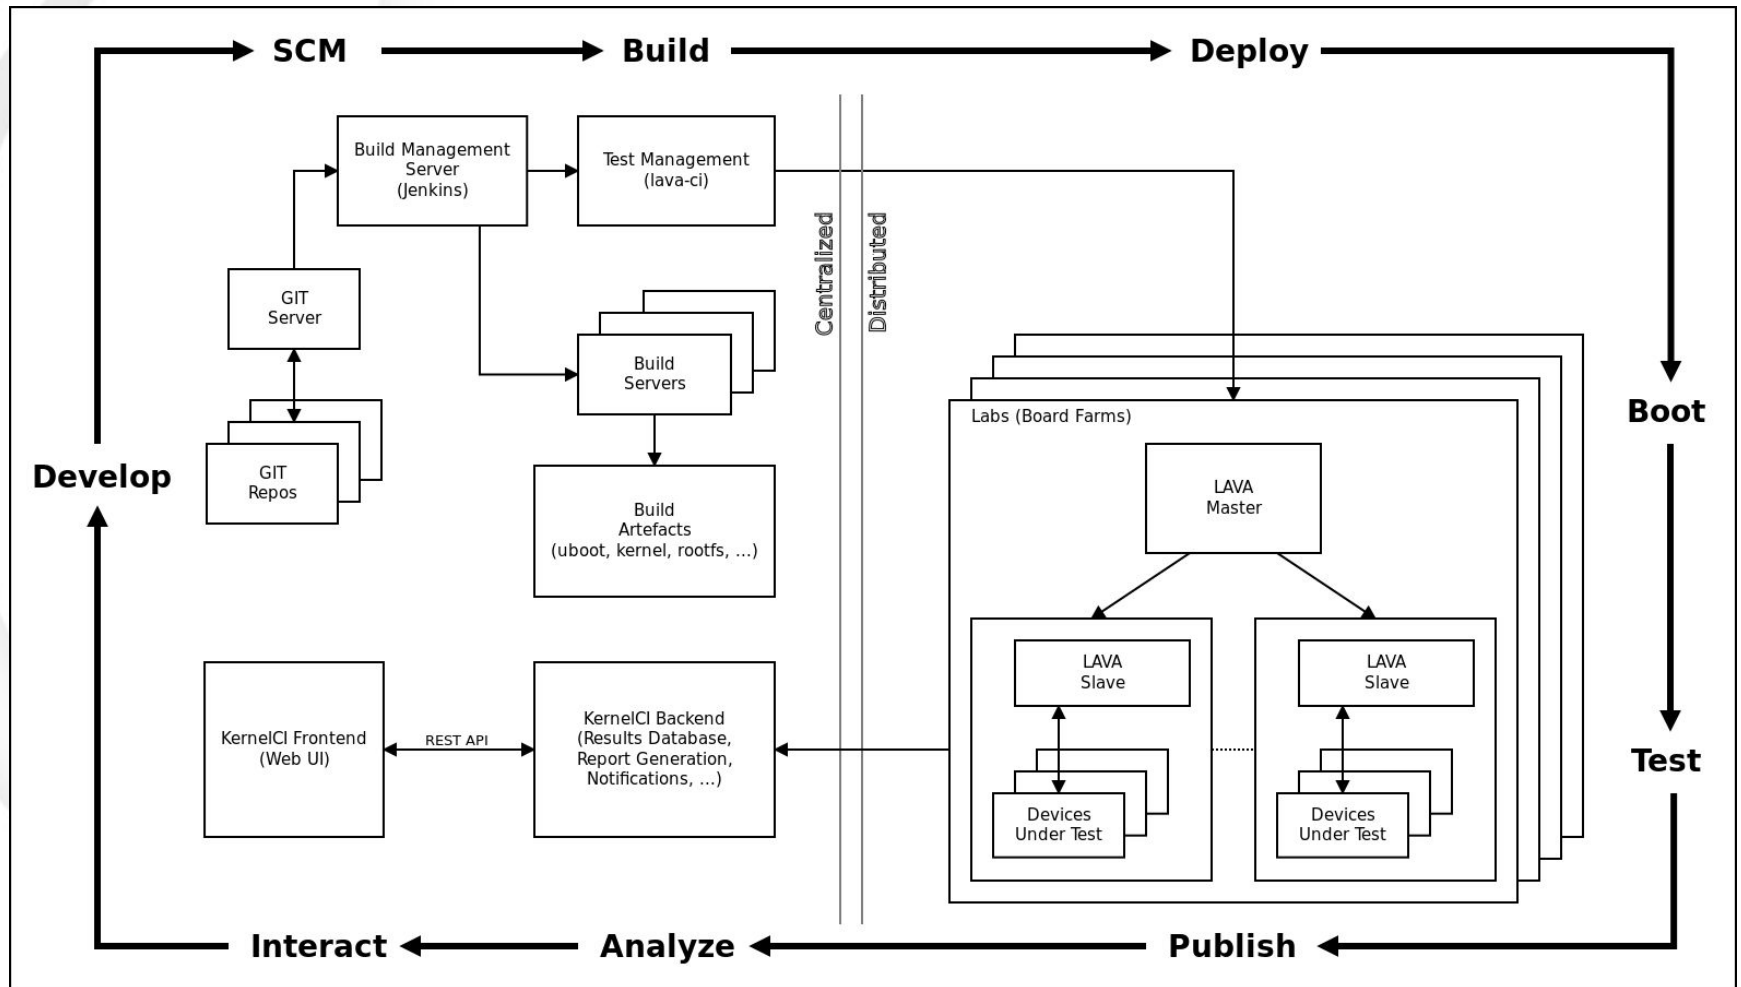

KernelCI Loop



AGL CI Loop

- Funded by Linux Foundation AGL Initiative
 - As part of the CIAT Group (Continuous Integration / Automated Testing)
- Leverages LAVA and kernelCI
- BayLibre updating and extending KernelCI to
 - Test AGL releases, snapshots and per-commit development
 - Run any kind of test instead of only build and boot
 - Generic test suites,
 - AGL-specific test suites,
 - Automotive-specific test suites,
 - Power & Performance profiling,




* Source: <https://wiki.automotivelinux.org/eg-ciat>




The “Lab in a Box” Concept

Motivations

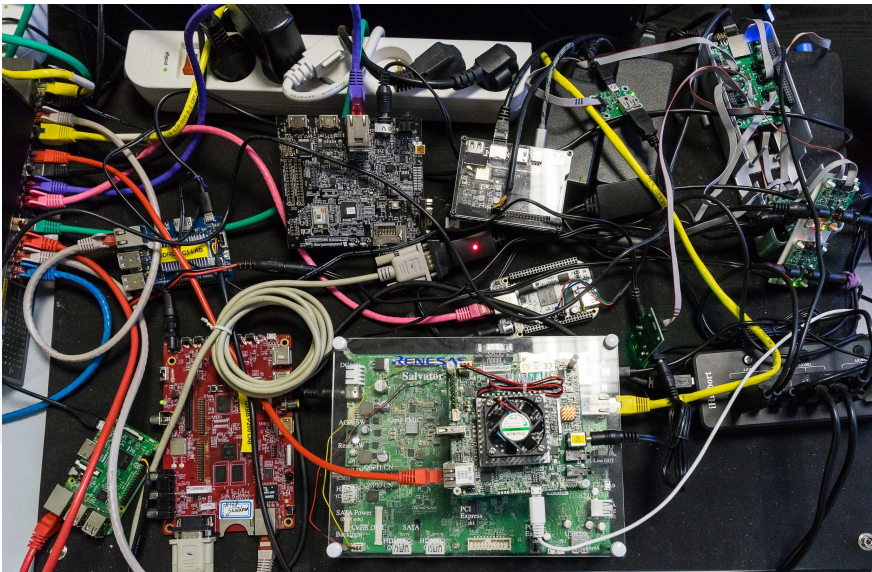

Time to go pro!

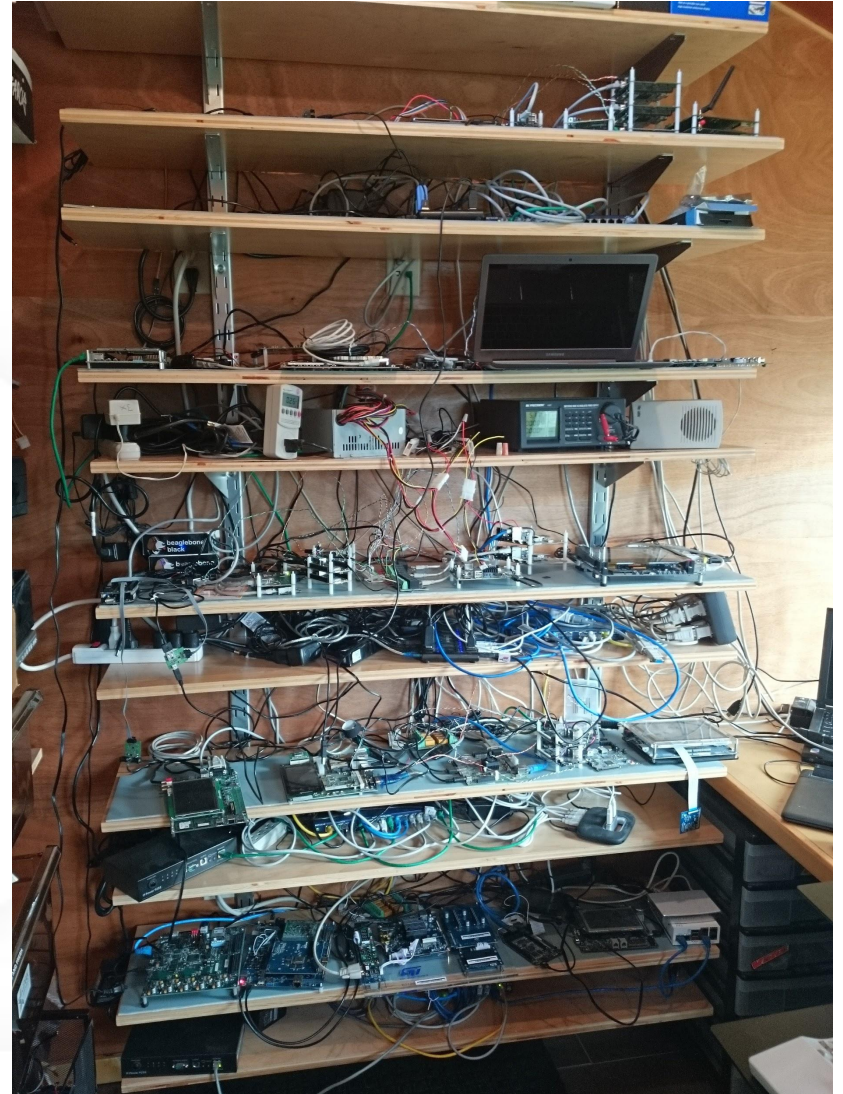

Motivations (2)

- Simplify Administration
 - LAVA: nice technology, but difficult to get into it
 - Installation process (now eased with Docker)
 - Device-types
 - USB Serial debug 'pairing'
 - Ultimately users shouldn't be aware of the internal technologies to build and run a CI Lab
- Ease duplication / scalability
- Accelerate deployment



Requirements

- “All in One” solution, integrating
 - LAVA master and dispatcher, Devices Under Test (DUT), power supplies for all DUT, connectivity / wiring (network, debug ports, power control, etc)
 - Reference & community AGL boards
- Low cost
- Scalable / Reproducible
- Safe / Maintainable
- Easy installation (HW + SW)
 - Pre-installed / pre-configured SW components
 - Administration control panel
- Fits in an apartment (for home workers)
- Documented



Challenges


- A lot of stuff to integrate in a single case
 - DUT
 - Custom size
 - Custom connections
 - Power Control unit
 - Lab Wiring
 - Network Switch
 - USB Hub
 - Per DUT
 - Power cable
 - Serial debug cable
 - Ethernet cable
- Maintenance




This is... LAVA box...



... unboxed

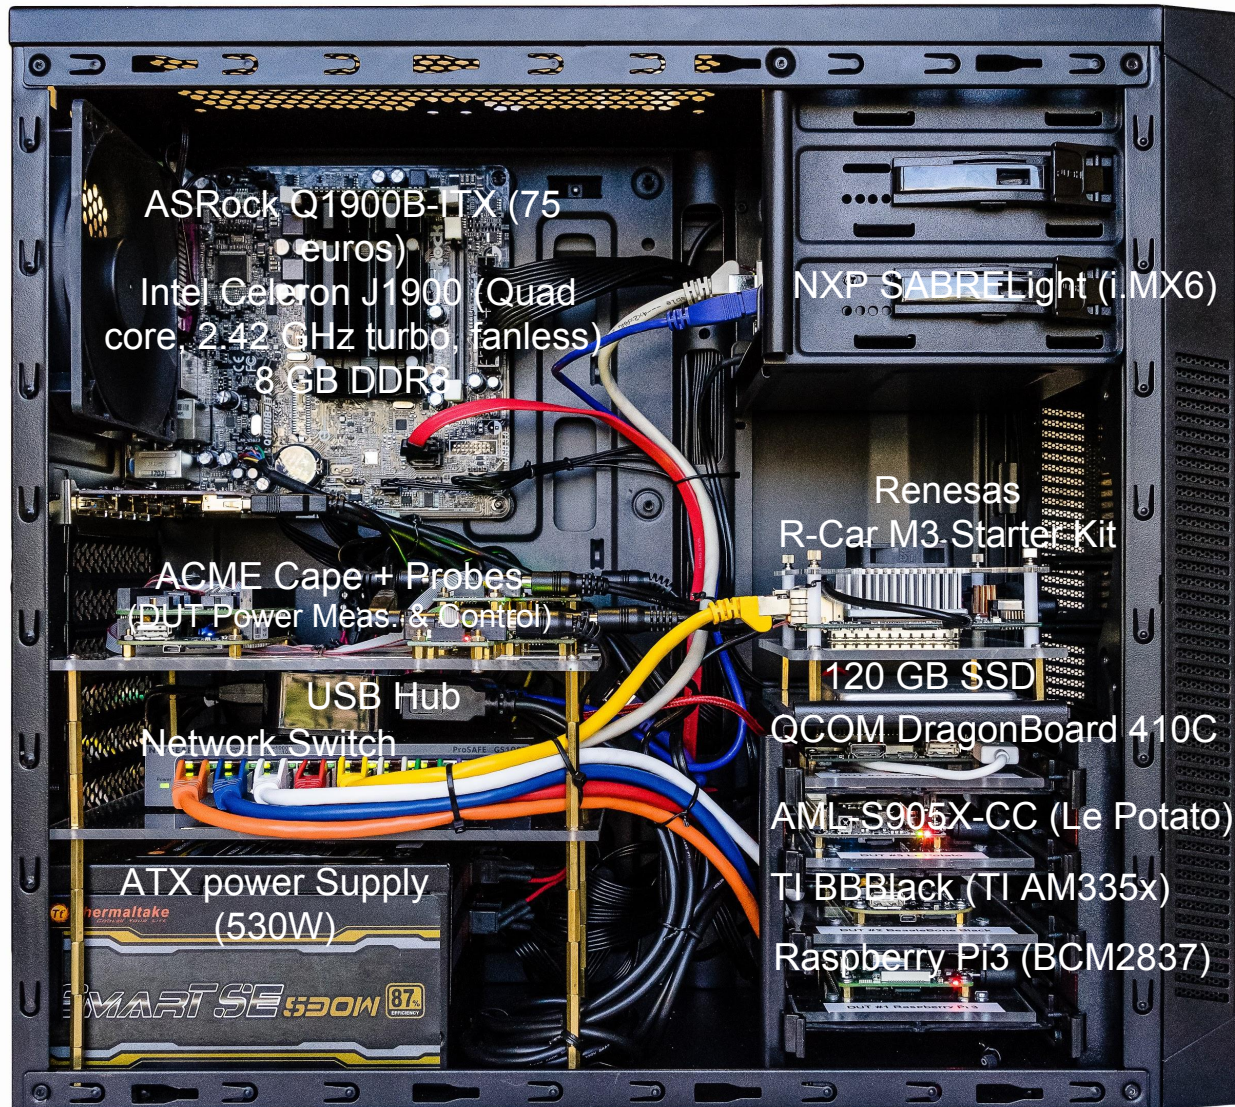

Welcome inside...

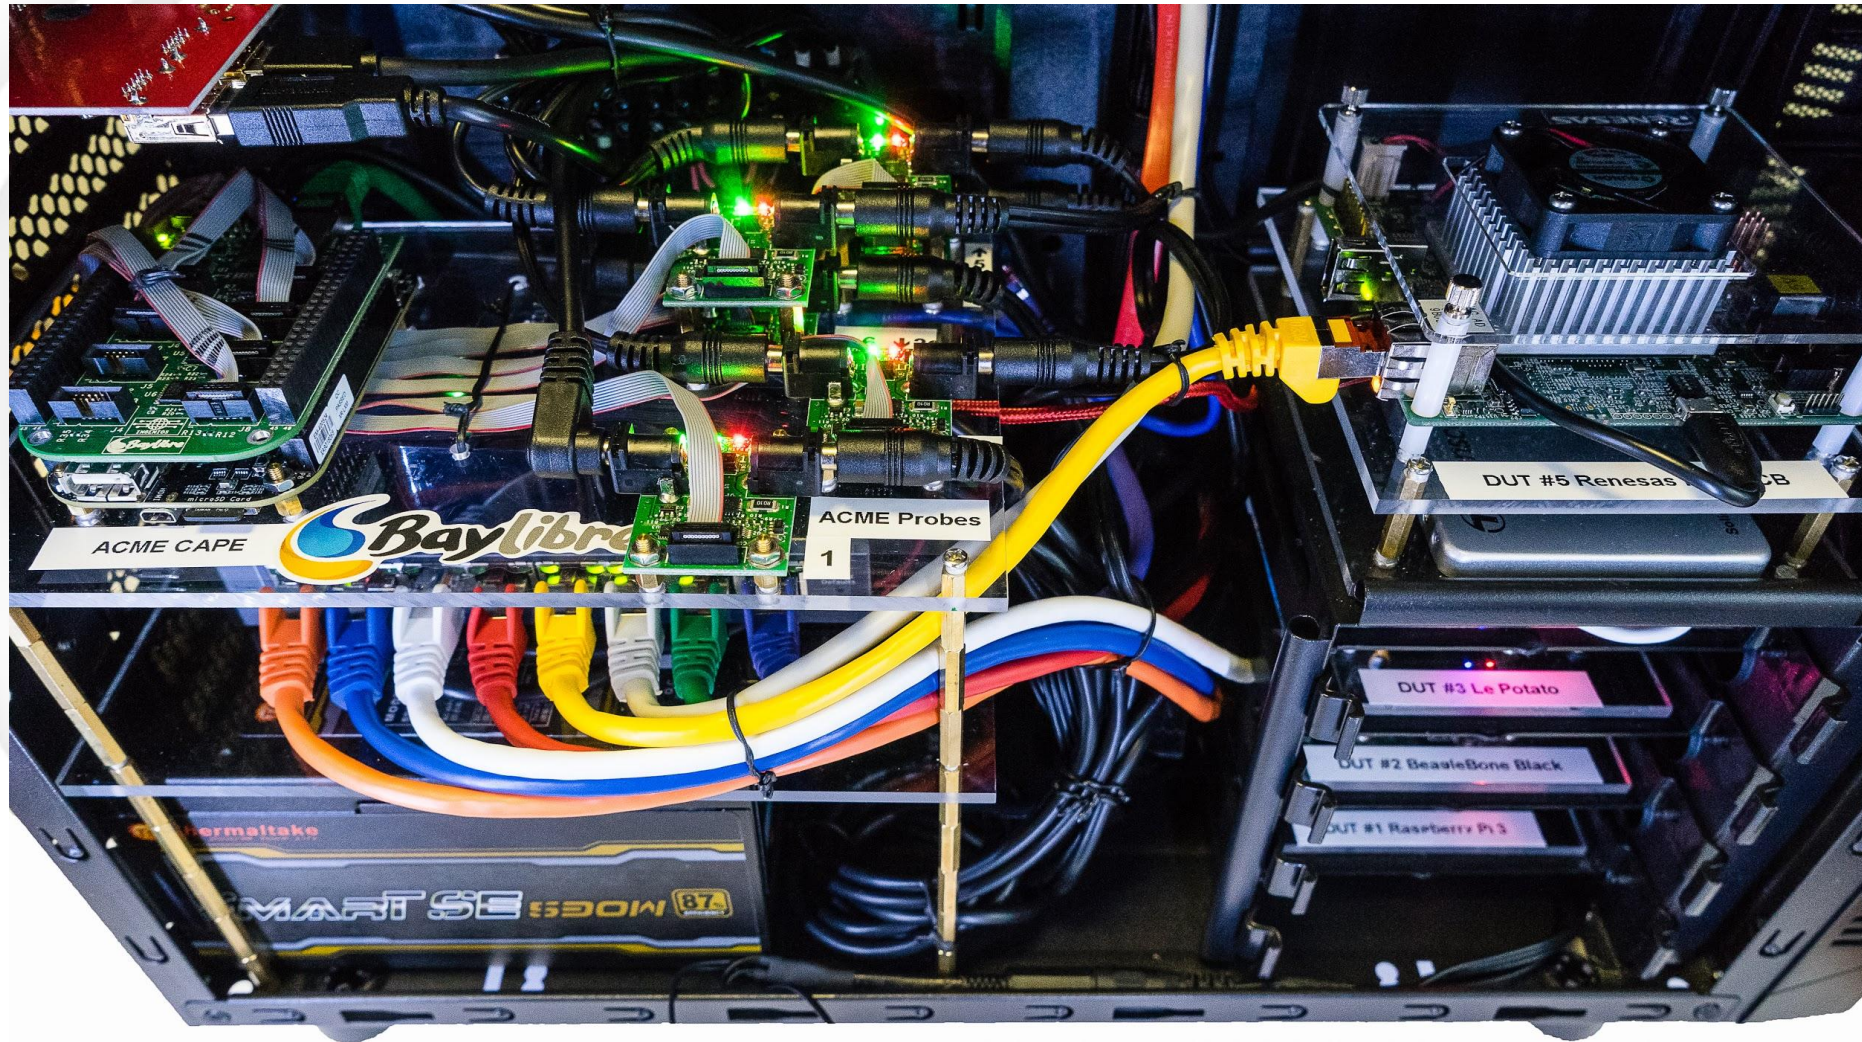

Hardware details: USB connections

Serial consoles

- USB serial cables
- cheaper cables are flaky
- we use FTDI

Power

Many devices power over USB too
(sometimes on the same cable as fastboot !)

USB Misc.

Android: fastboot / adb

USB gadget:

- ethernet
- mass storage

Allows loading without “real”
networking



Hardware details: Power

Power Distribution

Standard PC supply: ATX

- +5V
- +12V
- “standby” +5V

Power Switching

Simple, inexpensive

- Relays: GPIO or USB-controlled

Flexible, add measurement

- BayLibre ACME
- BBB cape + 8 channels of power switching and measurement

<https://baylibre-acme.github.io/>



Hardware details: networking

- 8-port switch inside the lavabox
- All devices on an separate LAN, internal to the lava-slave container
 - Isolated from the office LAN
 - Can integrate any kind of office LAN policy
- LAVA box needs internet access for jobs from kernel CI etc
- But, could also be internal LAN-only for local jobs



Software: LAVA dispatcher (slave)

Manage all connections between boards and “real world”

Services

- DHCP
- TFTP
- NFS
- NBD
- HTTP

Power control

- BBB + ACME
- lavapdu-daemon

Serial consoles

- USB / serial cables (FTDI)
- udev rules
- ser2net / conmux

USB misc.

- fastboot
- gadget: ethernet, mass storage



Containerized using: lava-slave-docker project

<https://github.com/kernelci/lava-docker/>



Software: LAVA server (master)

Board description

`device-type`

Web interface

What all boards of this “type” have in common

- u-boot , fastboot, barebox, etc.
- Load addresses
- Bootloader environment

Job scheduling, priorities

Can inherit/extend other device-types (e.g. base-uboot)

XML-RPC API

`device`

Board description

Specific to one instance of a board

- Select `device-type`
- How to connect to serial console
- PDU: how to power on/off
- Can override/extend settings from device-type



Containerized using: lava-docker project (from kernelCI)

<https://github.com/kernelci/lava-docker/>




Software: Bringing it together

```
# cat docker-compose.yml
services:
  lava-master:
    build: {context: lava-master}
    devices: ['/dev/kvm:/dev/kvm']
    hostname: lava-master
    ports: ['10080:80', '1022:22', '5555:5555', '5556:5556']
    restart: always
    stdin_open: true
    tty: true
    volumes: ['/boot:/boot', '/lib/modules:/lib/modules']
  lava-slave:
    build: {context: lava-slave}
    devices: ['/dev:/dev']
    environment: {LAVA_MASTER: lava-master}
    hostname: lab-slave-0
    links: [lava-master]
    ports: ['69:69/udp', '80:80', '55980-56000:55980-56000']
    restart: always
    stdin_open: true
    tty: true
  squid:
    build: {context: squid}
    hostname: squid
    ports: ['3128:3128']
    restart: always
    volumes: ['squid-cache:/var/spool/squid']
version: '2.0'
```

Multi-container management:

Docker compose






Important notice

- This is one HW implementation of the “Lab in a Box” concept
 - You may select your own components
 - Case, processing unit, power control unit, etc
 - You may decide to not integrate all the boards in the case
 - Large boards with accessories or test equipments
- The “Lab in a Box” SW does not depend on the HW, thanks to
 - LAVA HW abstraction layers,
 - Configuration files
 - Administration control panel



Achievements (1)

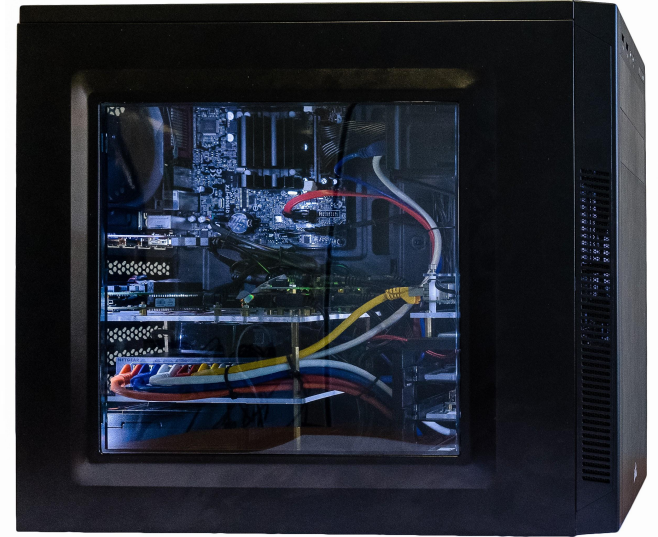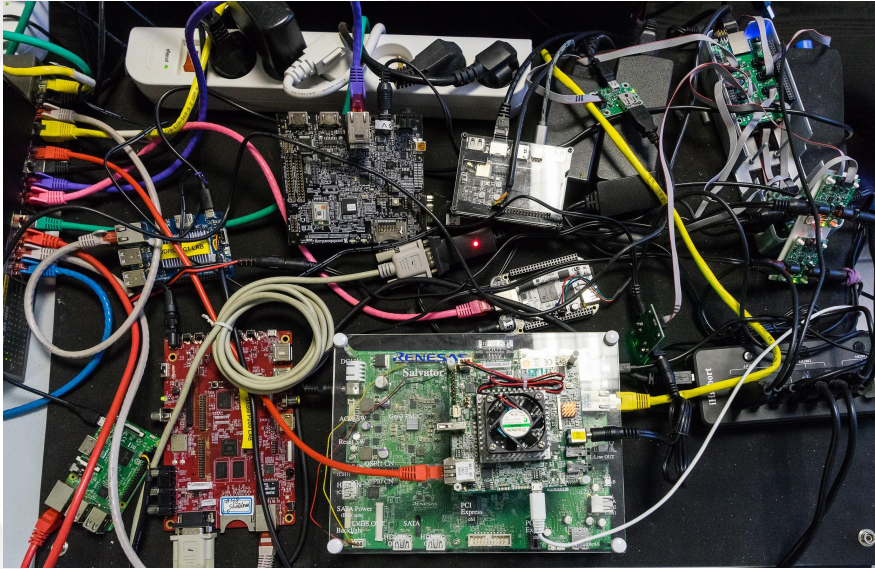

Achievements (2)

- Fully functional
- Complete CI LAVA lab integrated in single PC case
- No more wiring or boards laying on a desk / on shelves
- Fits well in our (small) apartments (for home workers)
- Good demonstrator for evangelising CI
- All DUT on drive trays, allowing easy maintenance
- Reasonable BOM cost (400 euros, excl. DUTs)
 - Reduced when recycling PC / USB Hub / Network Switch / ...
- Partially Automated SW installations (still under work)
- Containerized, scalable SW



Limitations

- Tedious (long) to build / Difficult to “mass produce”
- Requires good tinkering (incl. soldering) skills
- Heavily packed
- DUT size limited (2x 5” $\frac{1}{4}$, 5x 3” $\frac{1}{2}$, height)
- Supports only +5V and +12V powered DUT
- DUT power consumption must be balanced across ATX connectors
 - Do not exceed 4A per pair of wires
- Using a larger PC case may not allow integrating many more DUT
 - Excessive internal wiring
- No standard “CI” connector
 - Custom wiring for each new DUT



What could be improved?

- Use a more powerful power supply
 - The more powerful the ATX power unit is, the more SATA/Molex connectors (i.e. power rails) we get
- Integration of larger development boards
- Administration control panel
 - Automatic detection and assignment of new devices
- Too complex & expensive for a tiny lab (1 or 2 boards)
- Documentation



What's next?

- “Lab in a Box” was a first experimentation to validate the concept
 - Low-cost,
 - Targeting individuals/groups with only a few boards
- Next:
 - Address “1-board lab” use-case (“LavaBox-mini”)
 - Address Professional-grade “Lab in a ~~Box~~ Rack”
 - More SW installation automation
 - More SW administration automation
 - Including administration control panel
 - Connectivity (Wi-Fi / BT)
 - Integrate standard test jobs
 - Documentation
 - Basic docs and quick-start available in github project:
<https://github.com/kernelci/lava-docker/blob/master/README.md>



Q & A



Q+A

THANK YOU!

**Come see inside the LAVAbox at the
technical showcase !**

(Tuesday evening)

